



**JAZZ\_S**  
height 1260 mm, lenght 500 mm. Matt White finish (cod. J8).

#### Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular tubes 20x25 mm section
- 30x30 mm side squared manifolds
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C
- 50 mm connection
- not suitable for installation with a single-pipe system

#### Price included:

- 4 wall fixing in the same color as the radiator
- 2 1/2" hidden air vents complete with valve cover


#### Finishes available

Standard White  
Classic finished  
Special finished  
Other RAL colors

#### Surcharge


Finishing codes see page 596.

#### Connection dimensions with IRSAP valves




#### 50 mm REVERSIBLE connection

The radiator can be installed with the 50 mm headers on the left or right by simply rotating the product by 180°.






Type with collectors on the left  
Hydraulic connection 50 mm

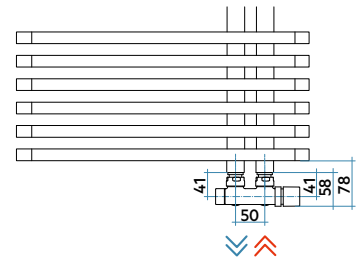


Type with collectors on the right  
Hydraulic connection 50 mm

#### TYPICAL INSTALLATION FOR ALL RADIATORS USING A TEE


"A" quota for IRSAP angle pattern valves and lockshield valves = 40 mm

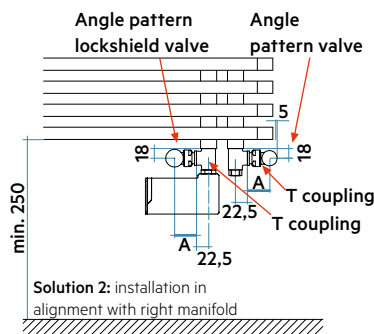


Order code: **VALKROSQMISTS01**



Order code: **VALKROSQMIST01**



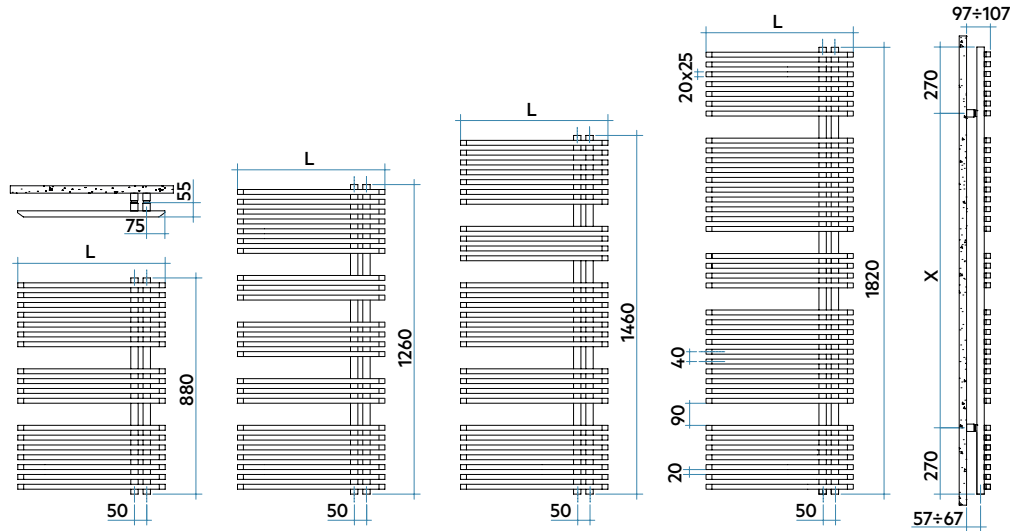

L mm	H mm	X mm
500	880	340
500	1260	720
500	1460	920
600	1820	1280

Model	Code	Depth mm	Height mm	Width mm	Conn. centre mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)	$\Delta t=20^{\circ}\text{C}$ Watt		
880 18 rails 2 espaces	<b>ZRS050 B 01 IR 01 NNN</b>	55	880	500	50	10,0	4,1	1416	<b>415</b>	318	<b>226</b>	140	1,189
1260 24 rails 4 espaces	<b>ZRM050 B 01 IR 01 NNN</b>	55	1260	500	50	13,6	5,4	1845	<b>541</b>	414	<b>293</b>	180	1,200
1460 29 rails 4 espaces	<b>ZRL050 B 01 IR 01 NNN</b>	55	1460	500	50	16,1	6,5	2175	<b>637</b>	486	<b>343</b>	209	1,216
	<b>ZRL060 B 01 IR 01 NNN</b>	55	1460	600	50	18,5	7,5	2494	<b>731</b>	557	<b>392</b>	239	1,219
1820 38 rails 4 espaces	<b>ZRG060 B 01 IR 01 NNN</b>	55	1820	600	50	23,9	9,7	3103	<b>909</b>	688	<b>479</b>	288	1,253



Mix. Funct.	Code
400	<b>ANRES400WDI</b>
400	<b>ANRES400WDI</b>
700	<b>ANRES700WDI</b>
700	<b>ANRES700WDI</b>
1000	<b>ANRES1000WDI</b>

Electric heater for Dual Power

BATHROOMS  
RADIATORS

(\*) Thanks to the high performance of Irsap JAZZ\_S radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at 30°C.

For  $\Delta t$  different from 50°C use the formula:  $Q=Q_n (\Delta t / 50)^n$


To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1820 x 600: **ZRG060 B 01 IR 01 NNN** (€ 740,00) + **ANRES1000WDI** (€ 197,29) = Tot. € 937,29


### Key Codes

Width	Standard White colour code - for different colour codes see the colors page			
<b>ZR</b>	<b>S</b>	<b>050</b>	<b>B</b>	<b>01</b>
Height	Packing code	Standard hydraulic code connection		
		<b>IR</b>	<b>01</b>	<b>NNN</b>


### Decorative & Technical Accessories



Kit Valves and  
Lockshield valve  
Pag. 562



Pipe cover kit  
Pag. 566



Electronic Control  
Pag. 574

