

Technical features:


- electric steel towel warmer radiator
- horizontal elements featuring rectangular 50x10 mm section tubes
- side round manifolds with a 30 mm diameter
- the radiator is filled with a cooling liquid and is combined with a boostersystem of electric power of 1000 watts.

This blower system provides a temperature uniform with the room in which it is installed.

Price included:


- 4 adjustable wall fixing brackets in the same color of the radiator
- Wireless remote control

Finishes available	Surcharge	
Standard White		
Classic finished		
Special finished		
Other RAL colors		 _
Finishing codes see page 596.		



right side manifold

Booster






MAIN CHARACTERISTICS OF AIR DIFFUSER

- ON/OFF switch
- Power supply 230 V 50 Hz, 1 ph
- Power installed = 1000 W
- Insulation: CLASS II
- Protection index: IP24
- Long electricity cable: 1.200 mm, SCHUKO plug
- Wireless remote control

SOUL_S AIR

Electric

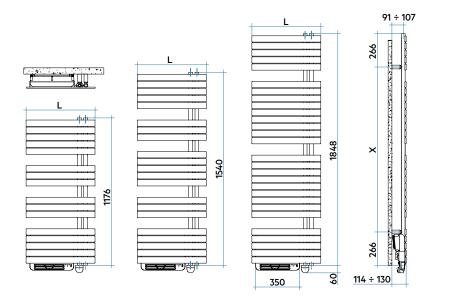

Lmm	Hmm	X mm		
	1176	644		
550	1540	1008		
	1848	1316		

CE

Model	Code	Depth	Height	Width	Weight	Electric Power	Auxiliary heater with diffuser	
1176 16 rails 3 espaces	UBS055 Z 01 IR 01	P mm NNN 110	<u>H mm</u> 1236	L mm 550	Kg 20,5	Watt 500	Watt + 1000	
1540 ²¹ rails 4 espaces	UBM055 Z 01 IR 01	NNN 110	1600	550	25,3	750	+ 1000	
1848 ²⁸ rails 3 espaces	UBE055 Z 01 IR 01 I	NNN 110	1908	550	31,6	1000	+1000	

The radiator will be supplied with the resistance always mounted on the inner collector.

Key Codes Standard White colour code - for different colour Width codes see the colors page UB S 055 Z 01 IR 01 NNN

Height

Packing code

Wireless Remote Control

SOUL_S AIR ELECTRIC with wireless thermostat is equipped with a wireless controller that allows remote management of every electric radiator function. Because the controller is wireless, it has the advantage of being quick and easy to install and does not require any modifications within the home.

Technical specifications

- · Wireless communication via radio signals transmitted to the receiver connected to the system
- Radiofrequency communication pursuant to European standards
- Operating modes: Manual, Automatic, Comfort, Economy, Holidays
- You can activate 3 manual functions, automatic and holiday
- Can be set comfort temperature of 5°C to 30°C
- Optional ITCS (Intelligent Temperature Control System)
- Open window detection function

